

USP TYPE



Coaxial self-priming pump

Introduction

- Use in corrosive Chemistry liquid conveying, main body part liquid medicine can be stored, can block short time without liquid idling, self-priming the fluid section according to the Chemistry of corrosive select material. Shaft seal the shroud unique design, adopts high temperature resistant plastic material, easy to replace disassembly, the damage will not be short time idling. The bottom of the suction side the installation of the Ford valve to prevent liquid reflux in the shutdown, the pump liquid return cause idling damage, use head more than 8M, exports should be retrofitted with check valve, PP and PVDF material.

Application

- The PCB manufacturing process, the etching process, Electroplating filter machine, The circuit board sprayed wash, chemical factories liquid medicine conveying.


Three phase 50HZ 2750rpm

TYPE	POWER	BORE	VOLTAGE	MAX CAPACITY	MAX HEAD	WEIGHT	Remark
	HP (kw)	INCH(mm)	V	L/min	M	KG	
USP240-11.1 205	1 1/2 (1.1)	1 1/2" (40)	380V—460V	240	13	26	
USP240-11.5 205	2 (1.5)	1 1/2" (40)		342	12	30	
USP250-12.2 205	3 (2.2)	2" (50)		373	14	38	
USP250-13.7 205	5 (3.7)	2" (50)		619	20	54	

Dimension

Unit:mm

TYPE	A	B	C	D	E	F	G	H	I	J	K	L
USP240-11.1 205	142	216	320	322	250	663	130	16	103	40	138	20
USP240-11.5 205	142	216	320	322	250	705	130	16	103	40	138	20
USP250-12.2 205	142	216	320	322	250	705	130	18	118	50	154	20
USP250-13.7 205	168	213	272	370	290	783	130	18	118	50	154	20

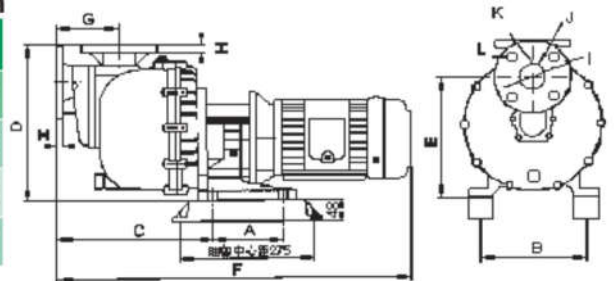

USP250-13.7 205

